



NEGATIVE POSITION

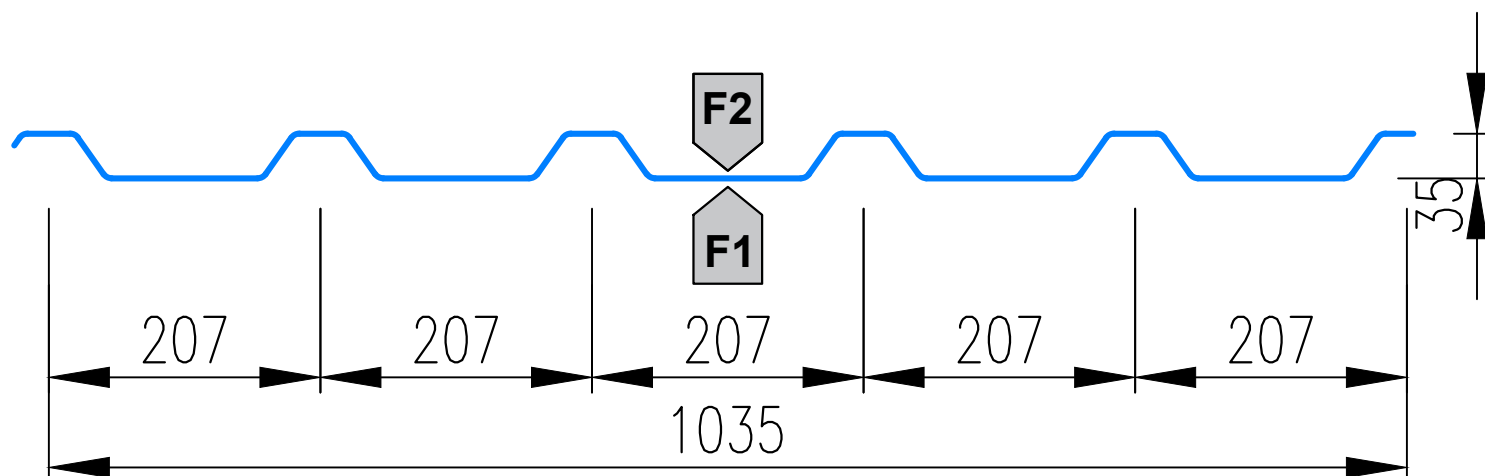

POSITIVE POSITION

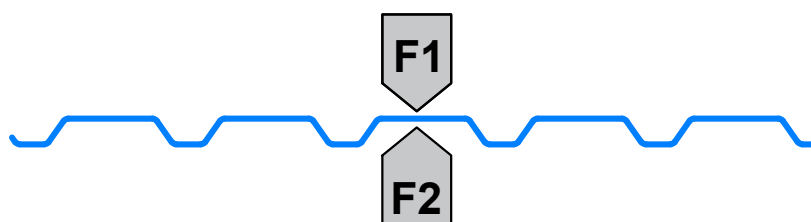

Technical data

Profile height	35 mm
Cover width	1 035 mm
Maximum length	22 000 mm
Recommended length ²	10 000 mm
Minimum length ³	1 000 mm

Thickness [mm]	Weight [kg/m ²]
0.50	4,75
0.63	5,98
0.75	7,12
0.88	8,35
1.00	9,49

Usage	roofing (negative position) lost formwork ceiling cladding (positive position)
Material (steel grade)	S320GD
Standard anti-corrosion protection ¹	Z140~275 g/m ² alt. ZM90~120 g/m ²
Standard coating ¹	face side SP 25 µm (Polyester) opposite side 7~10 µm (protective coating - RSL)
Colours	according to the colour chart
Anti-condensation protection	CB FLIS (DRIPSTOP)
External fire performance	B _{ROOF} (t1), B _{ROOF} (t2), B _{ROOF} (t3)
Reaction to fire class	A1
Accessories	profile fillers (foam profile seals) sealing tapes (foam, butyl,...) fasteners flashing and ending profiles

The final weight is affected by tolerances (plus or minus) and cannot be considered as a product defect!
Tolerances are specified in the relevant normative product standards. A production control system to ISO 9001 is in place.

Notes:

- Other combinations of coating type or thickness (e.g. 25 µm/25 µm) and other types of anti-corrosion protection are available on request.
- The recommended length takes into account mounting, handling and transport of the products.
- Minimum lengths from 200 mm are available on request under 0,75 mm.

CB PROFIL a.s.

registered office: Křižíkova 1762, 370 01 České Budějovice
tel.: +420 386 116 433, fax.: +420 386 116 434
IČ: 26107074, DIČ: CZ26107074
email: info@cbprofil.cz, www.cbprofil.cz